

BREWER'S SPECIAL


# Viking Wheat Malt Organic



## MALT CHARACTER

Organic Wheat Malt is made from high quality **wheat**. Varieties suitable for the brewing purposes are used. The malting process does not differ much from pilsner malt production. Final air-on temperature is normally 72–80°C.

## FLAVOR CONTRIBUTION

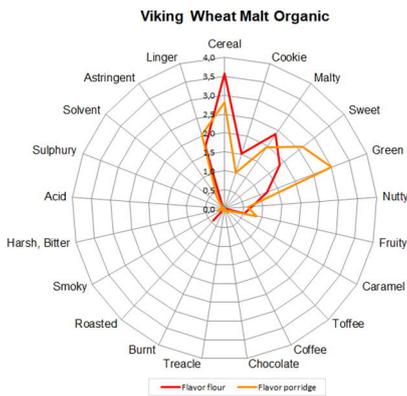

## PRODUCTION AND PACKAGING

Organic Wheat Malt is produced in Finland.

Available in bulk, containers, big bags and 25 kg pp bags.

## STORAGE AND SAFETY

Malt should be stored in a clean, dry, odorless and pest-free place, at a cool (on avg. <25°C) and stable temperature. Under these conditions unopened bags of malt can be stored for a minimum of 2 years from the date of bagging and unopened bags of crushed malt for a minimum 1 year from the date of bagging.

Opened bags are beyond Viking Malt's control, and we always recommend that opened bags are used at once. Anyhow, if opened bags are carefully re-sealed and then stored under the recommended conditions, they are expected to endure the storage times mentioned above.

You should always keep the malts away from hot surfaces.

Do not inhale the malt dust

## APPLICATIONS

Wheat malt is used mainly for wheat beers and some other top fermented beers. Wheat malt is also used for lager beers for flavor enrichment and to improve foam stability. Typical rate of usage is around 50% of the grist for wheat beers and appr. 20% for the premium lagers.

## GENERAL REMARKS

Wheat is an allergen – contains gluten.

Our malts are produced according to requirements in ISO 9001, ISO 22000 or FSSC 22000 and ISO 14001

Organic, Kosher and other specific certificates are granted locally.

No GMO raw materials are used.

All the used barley varieties are tested and approved for malting and brewing.

Analysis of our malts are carried out according to EBC Analytica (or similar) when possible.

Product descriptions are subject to crop changes.

## MALT SPECIFICATION

moisture	%	max. 6.0
extract fine	% dm	min. 82.0
color	°EBC	4–6
pH		5.7–6.3
protein	% dm	max. 14.0
sol. nitrogen	mg/100	max. 900
foreign matter	%	max. 4
diastatic power	WK dm	min. 200